

# BABY LOCK SEWING ACCESSORIES

## Walking Foot with Two Quilt Guides

(BLDW-H) (BLDW-L)


### Instructions

The Baby Lock Walking Foot is wonderful for fabrics that stretch or slip easily, such as velvet or corduroy. This foot has a set of feed dogs that help feed multiple layers evenly without shifting. This walking foot comes with two easily interchangeable soles, a standard sewing sole and an open toe sole. It also comes with two exclusive 4.5" extension quilting bars.

#### Baby Lock Exclusive Features:


- 1/4" cutout on the inside left and right toes of each sole for stitching 1/4" away from a seam or marking.
- V-groove rubber feeding system that helps feed fabric evenly.
- Feed fork with plastic cover for smooth and quiet performance.
- Vertical marking on each sole 1/4" in front for turning corners.

#### To Attach Walking Foot on the Machine:

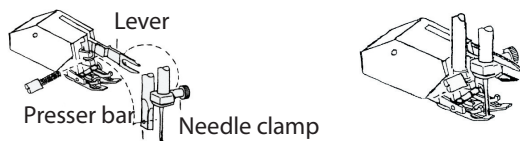

1. Raise the needle and presser foot.
2. Remove the presser foot, presser foot holder and presser foot holder screw.
3. Attach the walking foot to the presser bar with the lever surrounding the needle clamp.
4. Securely tighten the walking foot to the presser bar with the presser foot holder screw.

#### To Replace the Sole:

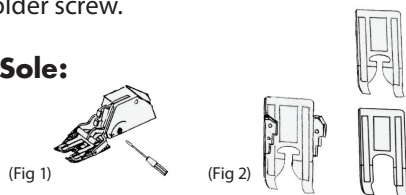

1. Loosen the screw 3 to 5 turns (see figure #1) and slightly pull the sole holder out to release the sole.
2. Align the holes of the replacement sole so both sides are inserted in the holes, 2 holes on the left and one on the right (see figure #2).
3. Tighten the screw.




Vertical marking for turning

#### Helpful Hints:

- Use this foot when sewing only forward feeding stitches.
- Operate the machine at low to medium speed.
- To use the needle threader, lower the presser foot and raise the needle to the highest position.

#### To Attach Seam Guide:

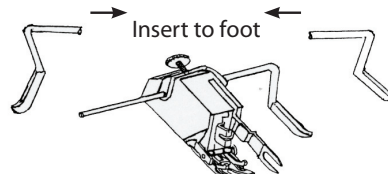

1. Place U-shaped piece over the top of foot and line up with the holes on the foot.
2. Insert seam guide into U-shaped piece and through foot. Insert right guide into right side of walking foot; insert left guide into left side of walking foot.
3. Push guide through to the desired width.
4. Tighten the large screw on the top of the U-shaped foot. Make sure the screw is tight so the guide doesn't move when sewing.

**Note:** ESE/ESE2, ESG/ESG2/ESG3 and ESL machines require the use of an adaptor for this foot.



**FOR THE LOVE OF SEWING**