




Finished Combo Block

The CutRite™ 60° Diamond 9" Finished pieces can be combined with the CutRite™ 60° Diamond 4.5" Finished pieces.

# CutRite™ 60° Diamond 4.5" Finished Template Set

Using the *Slit 'N Sew™* Method

*The Fastest, Easiest Way to Piece  
for Quilters of all Skill Levels*

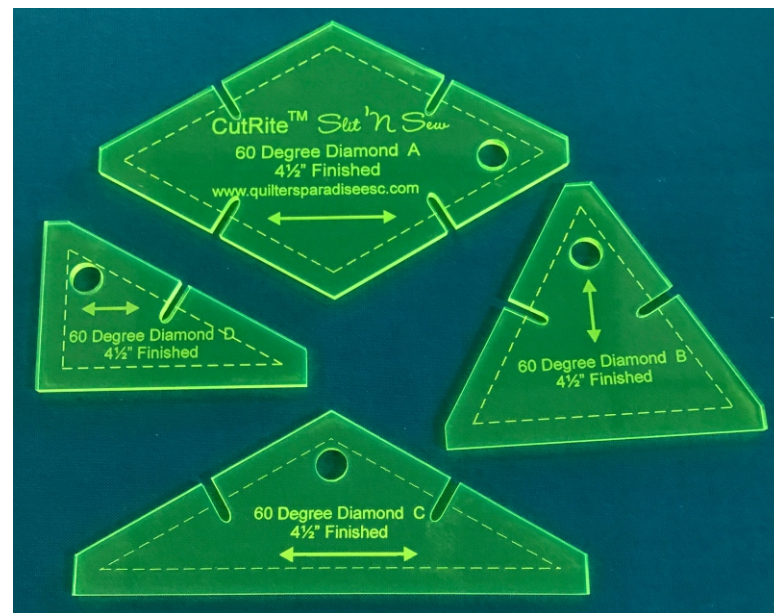

## What is the Slit 'N Sew™ Method by Quilter's Paradise?

Slits cut into pieces for easy and perfect alignment during piecing - each and every time.

No tedious pinning or paper piecing saving lots of time and effort!

Can be performed by all quilters, from novice to expert!

Please visit our web site for more information, videos and other Slit 'N Sew products.

*Making Quilting Simpler*

[www.quiltersparadiseesc.com](http://www.quiltersparadiseesc.com)



*Quilter's Paradise*


*Making Quilting Simpler*

[www.quiltersparadiseesc.com](http://www.quiltersparadiseesc.com)


Designed and Written by Quilter's Paradise  
© Quilter's Paradise All rights reserved.  
Made in USA

# Cutting Directions

Remove templates from package. Affix the CutRite™ HandiGrabber material to the back of the templates so they will not slide when cutting. We suggest adding 1/4" wide strips along each straight edge of each template on the inside of the engraved 1/4" seam allowance line. See picture below.




Need two 5" squares for all of the pieces.




HandiGrabber strips



Cut each slit from the inside out.




Piece A's will be the inside of the project.  
Piece B's will be at the top and bottom.  
Piece C's will be on the sides.  
For each project you will only need 4 D's. These go in the corners.

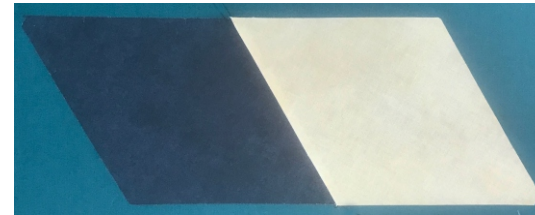


Press to the dark side.

Have fun laying out your blocks!  
Here are some examples.

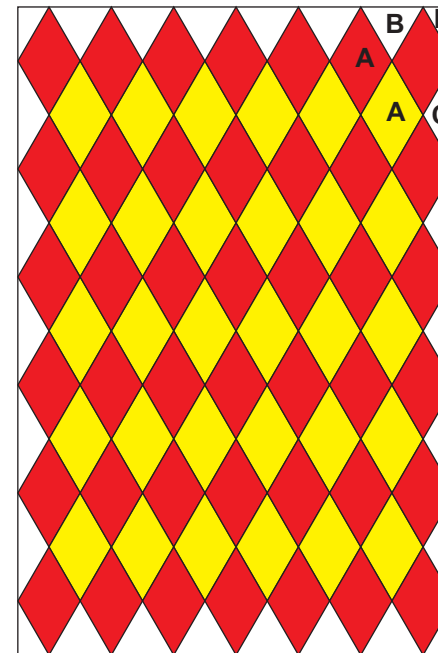

17.5" x 27"

42 A red  
30 A yellow  
12 B  
10 C  
4 D

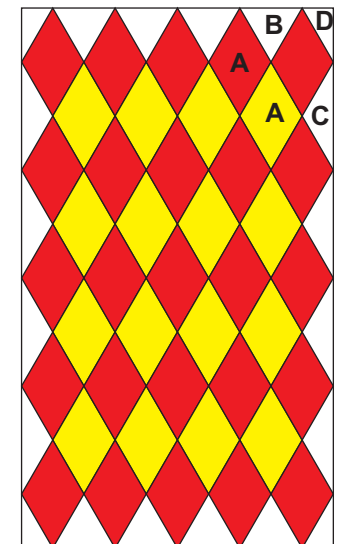


12.5" x 22.5"

25 A red  
16 A yellow  
8 B  
8 C  
4 D


Sew left corner (piece D) to row1 matching slits.

Sew row2 to row3 matching slits.




Sew row1 to row2 matching slits.

Sew row5 to bottom corner (pieceD) matching slits.



Sew row3 to row4 matching slits.

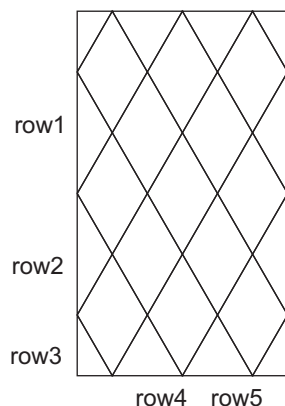

Once fully cut out, pull so you can see the slits.

## Helpful Cutting Hints

Use a sharp rotary cutting blade.

Use either a 28 mm or 45 mm rotary cutter blade. Experience suggests that the 28 mm size tends to work better when cutting tighter curves and cutting slits.

Always cut slits away from yourself by putting the rotary cutter on the inside end of the slit and cutting to the edge of the template.


Cut slits must and need not extend inside the 1/4" seam allowance line. This will not occur with use of 28 mm or 45 mm rotary cutter blades.

You are encouraged to experiment with scrap fabric first to see which blade size and cutting technique work best for you along with how many layers of fabric to cut at a time.


You can use a sharpened pencil or fine tipped marker to mark the slits and use scissors to cut the slits. However, be sure that the marks and cuts do not go inside the 1/4" seam allowance line.



# Layout Directions

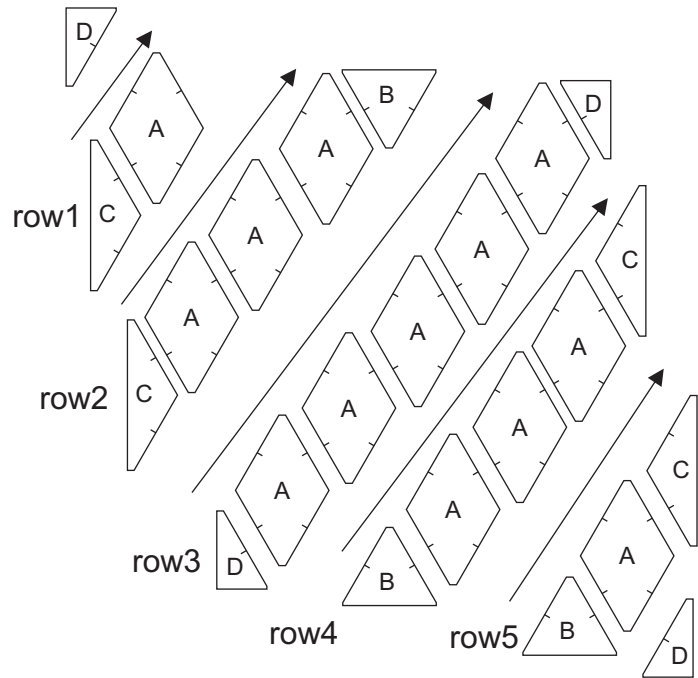


Sew rows 1 through 5.

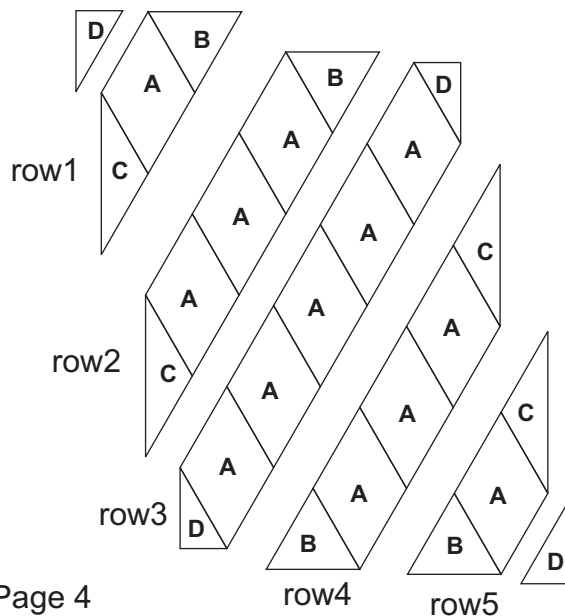

# Sewing Directions

(showing piece A to piece A)



Place Piece A face up.  
Place another Piece A  
face down matching the  
slits.



Stitch 1/4" from the edge.



Finished seam.

