



SELECT Cutaway TUTORIAL Sewing Patchwork Blocks



1. Using fabric scraps, cut out small pieces for the quilt block.




2. Cut a piece of Select Cutaway at least 1/2 inch larger than the intended quilt block. Draw a grid on the fusible side of the Cutaway and place wrong side of patchwork pieces to the fusible side of the Cutaway.




3. Using a Teflon or parchment sheet cover block and press using a medium iron temperature.



4. Once the block has cooled, remove pressing sheet and begin to sew seams by folding with right sides together all horizontal seams.

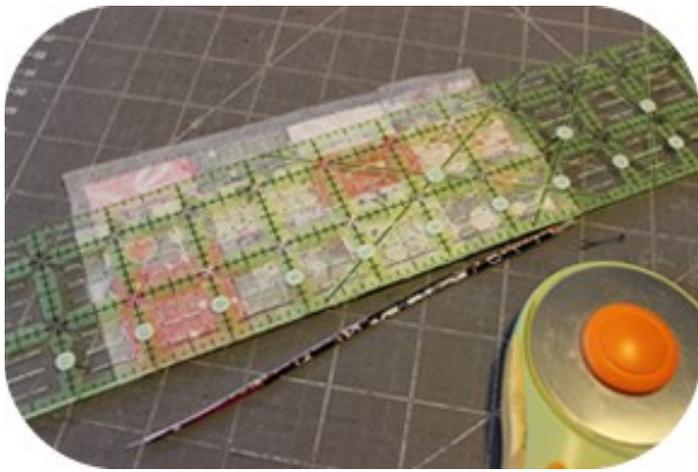

5. Using a ruler and rotary cutter trim off about 1/8 inch on each folded seam and press seams open.

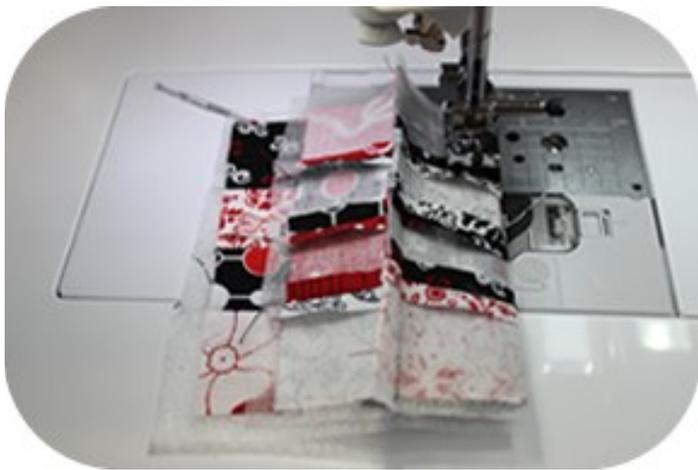

6. Repeat steps 4 and 5 on the vertical seams.



7. Select Cutaway has made it easy to match up all seams on your quilt block and with the sheer and soft feel it has not added any bulk to the patchwork block.


FLORIANI
RNK Distributing.com


Alex
AlexAndersonQuilts.com

QUILTERSSELECT.COM