

SPECIFICATIONS

ELECTRICAL	120V / 10 Amps / 60Hz	
BOILER CAPACITY	0.58 GAL	2.2 L
WATER CAPACITY	0.5 GAL	1.9 L
OPERATING PRESSURE	Up to 50 PSI	3.5 BAR
WATTAGE	1000 Watts	
STEAM TEMPERATURE	200°F	93°C
STEAM GUN	3000DA with Quick connect	
STEAM GUN HOSE LENTH	6' Steam Hose	
TANK CONSTRUCTION	Stainless steel	
LOW WATER INDICATOR	Standard	
STEAM CONNECTOR TYPE	Quick-release	
ECO FUNCTION	Saves up to 33% energy costs	
NET WEIGHT	12.85 lb	5.8 kg
SHIPPING WEIGHT	17.2 lb	7.8 kg
PRODUCT DIMENSIONS (W X H X D)	8" x 12.25" x 10"	20.3 x 31.1 x 25.4 cm
SHIPPING DIMENSIONS (W X H X D)	16" x 17" x 12"	40.64 x 43.18 x 30.5 cm
ELECTRICAL APPROVAL	cETLus	
COUNTRY OF ORIGIN	Italy	
WARRANTY	Limited 1 year, 2 year boiler tank	

5100CD

2.2L DENTAL LAB STEAM CLEANER


Introducing Eco-Mode in the all new 5100CD dental lab steam cleaner. Eco-Mode will save you up to 33% in energy costs by reducing the energy consumption when the boiler is not being used. Smart for your wallet and smart for the planet.

The 5100CD has an absolute capacity of 2.2L, uses our new external heating element system to maximize the amount of steam available to use and has an operating pressure of 3.5 bar / 50 P.S.I. for maximum cleaning effeciency. The supplied 3000DA steam gun with quick connect functionality and variable steam control provides optimum, focused cleaning power for the toughest jobs.






2.2L DENTAL LAB STEAM CLEANER

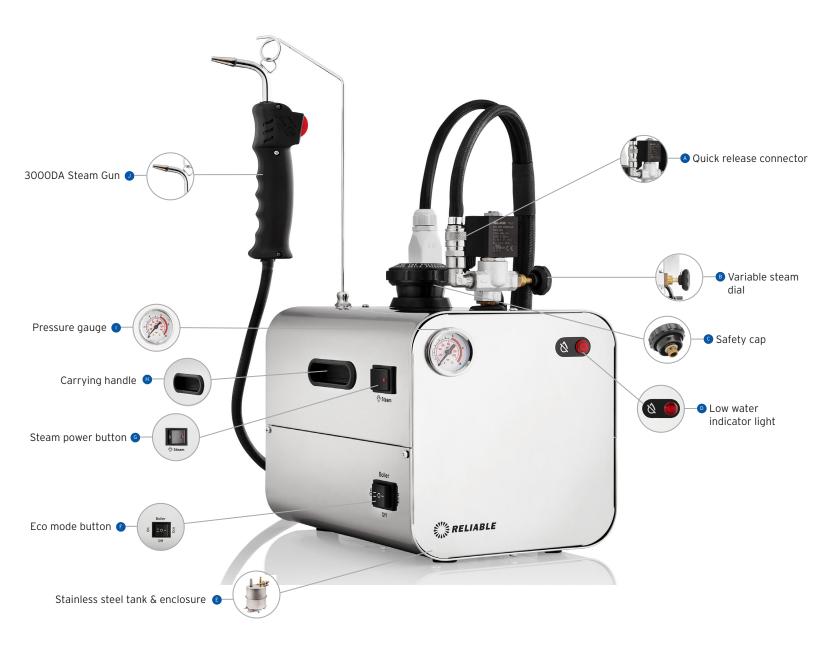



2.2L DENTAL LAB STEAM CLEANER

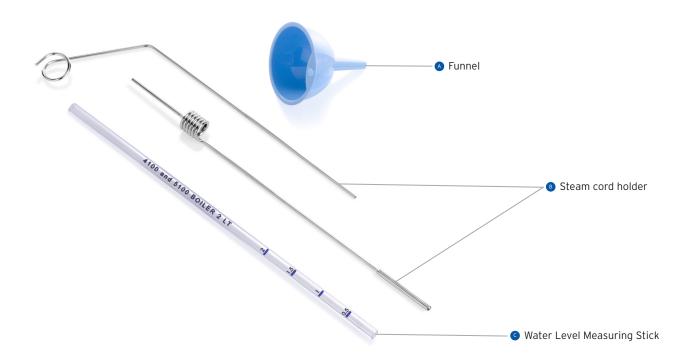

OPTIONAL ACCESSORIES

Flat tip

3000IA Steam gun with flat tip



1400IA Boiler Stand

REPLACEMENT ACCESSORY



3000DA Steam gun

